


Specification

Nominal Voltage		12 V
Capacity (25°C)	20HR(10.5V)	7.2Ah
	10HR(10.5V)	6.6Ah
	1HR(9.60V)	4.6Ah
Dimension	Length	151±1.5mm (5.94inch)
	Width	65±1mm (2.56inch)
	Height	94±1mm (3.70inch)
	Total Height	100±1mm (3.94inch)
Approx. Weight		2kgs (4.41lbs) ±5%
Terminal type		T1/T2
Internal resistance (Fully charged, 25°C)		Approx. 28mΩ
Capacity affected by temperature (20HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range	Discharge	-15°C ~ 50°C (5°F ~ 122°F)
	Charge	-10°C ~ 50°C (14°F ~ 122°F)
	Storage	-20°C ~ 50°C (-4°F ~ 122°F)
Float charging voltage(25°C)		13.60 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage(25°C)		14.50 to 14.90V Temperature compensation: -30mV/°C
Maximum charging current		2.1A
Terminal material		Copper
Maximum discharge current		105A(5 sec.)
Designed floating life(20°C)		3~5 years



Dimensions

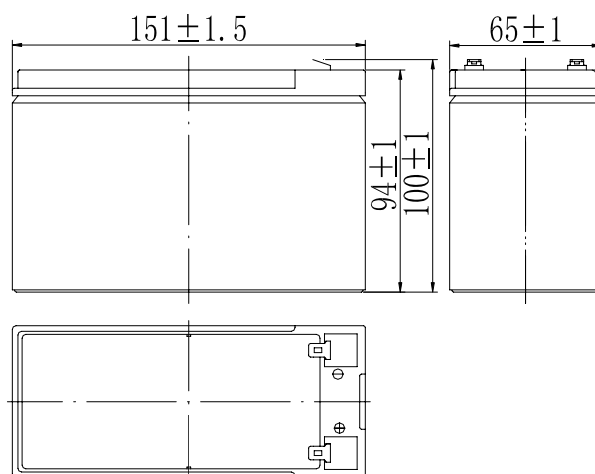

- ◆ Absorbent glass mat technology;
- ◆ Recognized by RoHS& CE;
- ◆ ABS container.

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
9.60V	27.1	17.1	13.4	7.49	4.60	2.50	1.80	1.44	1.22	0.67	0.36
9.90V	26.3	16.6	13.1	7.34	4.53	2.49	1.79	1.43	1.22	0.66	0.36
10.2V	25.2	15.9	12.6	7.12	4.41	2.47	1.77	1.42	1.21	0.66	0.35
10.5V	24.1	15.3	12.2	6.95	4.32	2.43	1.76	1.41	1.20	0.66	0.35
10.8V	22.8	14.4	11.6	6.69	4.19	2.37	1.71	1.37	1.16	0.64	0.35

Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
9.60V	303	193	153	85.9	53.2	29.3	21.4	17.1	14.6	7.99	4.29
9.90V	294	187	149	84.2	52.4	29.1	21.2	17.0	14.5	7.95	4.28
10.2V	282	180	144	81.6	51.1	28.9	21.1	16.9	14.4	7.92	4.26
10.5V	269	172	139	79.6	50.1	28.4	20.9	16.8	14.3	7.87	4.23
10.8V	254	162	132	76.7	48.5	27.7	20.3	16.3	13.9	7.71	4.15

Note: The above characteristics data can be obtained within three charge/discharge cycles.

JUST Series -Long Life Standby AGM Characteristics Curve

